



XYZ
MACHINERY



品质驱动,创新专业灌装设备成就您的生产力

SIMPLE YOUR PRODUCTION SAVING YOUR TIME

MACHINERY

荆州市荣源机械设备有限公司


XYZ MACHINERY CO.,LTD.

+86 13554601757

+86 13554601757

info@xyzmachinery.com

www.xyzfillingmachine.com



WECHAT



WHATSAPP

关于我们 ABOUT US

荆州市荣源机械有限公司
及医疗等领域的灌装
生产线、专业的研
发团队,帮助企业优化

Founded in XYZ Machinery
packaging solutions

Machinery has grown over the years to become a leading player in the industry, supported by mature production lines, a skilled R&D team, and advanced manufacturing techniques. We are committed to providing efficient, precise, and safe packaging solutions that enhance production workflows and increase operational efficiency for our clients.

自成立以来,荆州市荣源机械有限公司始终秉持“创新引领、品质至上、客户为先”的经营理念,不断推动技术创新和产品升级。目前,公司产品涵盖自动灌装机、封口机、贴标机等多个品类,广泛应用于食品、医药、化妆品和化工等多个行业,深受客户信赖。公司产品不仅在国内市场占有一席之地,还远销海外多个国家和地区,建立了广泛的国际合作网络。

Since its inception, XYZ Machinery has adhered to the business philosophy of “Innovation Driven, Quality First, Customer Foremost,” constantly promoting technological innovation and product upgrades. Our product range includes automatic filling machines, sealing machines, labeling machines, and more, widely used across industries such as food, pharmaceuticals, cosmetics, and chemicals. With a strong domestic market presence and exports to numerous countries and regions worldwide, XYZ Machinery has built an extensive international cooperation network..

在服务方面,我们秉持“客户至上”的服务宗旨,提供全方位的售前、售中和售后服务。我们拥有一支经验丰富的技术支持团队,随时为客户提供产品选型、技术支持、安装调试及维护保养等服务,确保客户的设备稳定运行、效益最大化。未来,我们将继续专注于机械制造领域的创新,致力于为全球客户提供更加优质的产品和服务,携手共创美好未来。

In terms of service, we uphold a "Customer First" service principle, offering comprehensive pre-sale, in-sale, and after-sales support. Our experienced technical support team is always available to assist clients with product selection, technical support, installation, commissioning, and maintenance, ensuring stable equipment performance and maximizing efficiency. In the future, we will continue to focus on innovation in machinery manufacturing, aiming to provide superior products and professional services to clients worldwide, and to work together toward a prosperous future.



桌面全自动液体灌装线

XYZ DESKTOP LIQUID FILLING LINE

适用范围

SCOPE OF APPLICATION

桌面式液体灌装线尺寸小巧, 方便按照, 操作灵活。主要适用余各种小容量瓶型灌装封口贴标。PLC触摸屏操作, 适用多种瓶子尺寸。

The desktop liquid filling line is compact, easy to follow and flexible to operate. It is mainly suitable for filling, sealing and labeling of various small-capacity bottles. It is operated by PLC touch screen and is suitable for a variety of bottle sizes..

> 技术参数 <

灌装头数量 FILLING NOZZLES	4 头 4 FILLING NOZZLES
灌装速度 FILLING SPEED	25-30瓶/分钟 25-30 BPM
功率 POWER	1.5KW
电压 VOLTAGE	220V/110V
气压 AIR PRESSURE	0.6-0.8MPA



理瓶台
BOTTLES
FEEDING MACHINE

四头磁力泵灌装机
FOUR HEADS MAGNETIC
PUMP FILLING MACHINE

四轮搓盖机
FOUR HEADS
CAPPING MACHINE

圆瓶贴标机
ROUND BOTTLES
LABELING MACHINE

收瓶机
BOTTLES
COLLECTION TABLE



全自动膏液灌装线

FULL AUTOMATIC PASTE/LIQUID FILLING LINE

> 技术参数 <

灌装头数量	FILLING NOZZLES	2/4/6/8/
灌装速度	FILLING SPEED	25-30瓶/分钟 25-30 BPM
功率	POWER	1.5KW
电压	VOLTAGE	220V/110V
气压	AIR PRESSURE	0.6-0.8MPA

适用范围


SCOPE OF APPLICATION

全自动膏液灌装线广泛适用于食品、化工、医药等行业的多种膏状和液体产品的高效灌装和包装。该灌装线能够处理不同黏度的液体与膏体,适合例如果酱、酱料、化妆品乳液、药品糖浆等产品的自动灌装需求。其智能化设计使其能够实现精确的剂量控制,有效避免浪费,提高生产效率。同时,该灌装线具有良好的兼容性,支持多种容器类型和灌装量的快速转换,满足不同批次生产需求,是中大型企业提高自动化水平的理想选择。

The XYZ full automatic paste/liquid filling line is widely applicable across various industries, including food, chemical, and pharmaceutical, for efficient filling and packaging of diverse paste and liquid products. This filling line can handle different viscosities, making it suitable for automatic filling needs of products like jams, sauces, cosmetic lotions, and medicinal syrups. Its intelligent design allows for precise dosage control, effectively minimizing waste and boosting production efficiency. Additionally, it offers excellent compatibility, supporting quick switching between various container types and filling volumes to meet the needs of different production batches, making it an ideal choice for medium to large enterprises looking to enhance automation.

全自动膏液灌装线

FULL AUTOMATIC PASTE/
LIQUID FILLING LINE

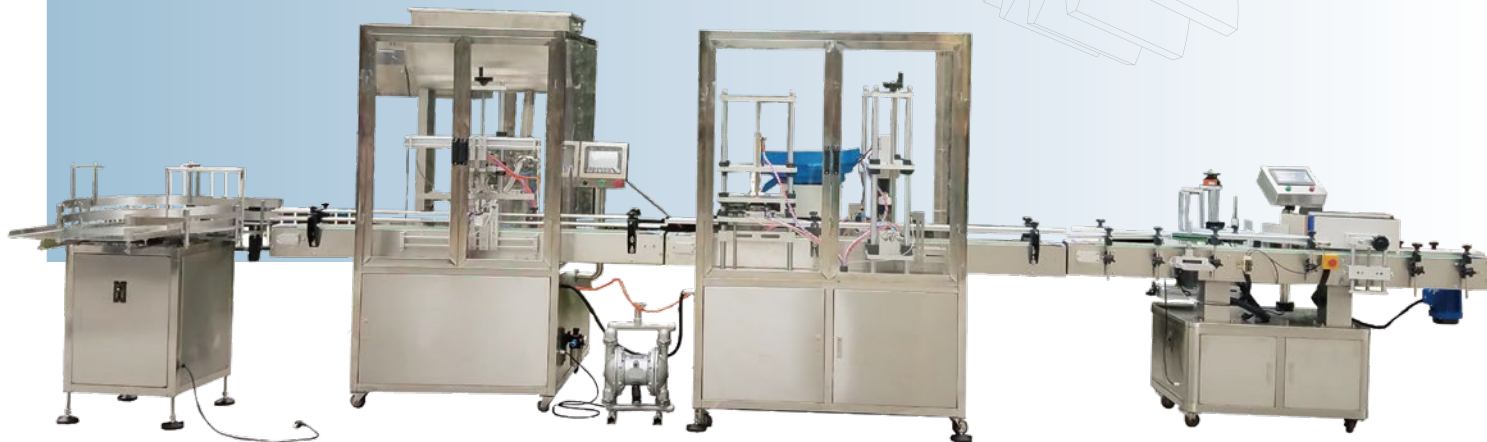

双头粉体灌装 旋盖生产线

DOUBLE HEADS
POWDER FILLING
CAPPING LINE-P7




转盘式灌装旋盖机

ROTARY TYPE FILLING
CAPPING MACHINE-P8



小型粉体灌装旋盖 贴标生产线

SMALL SIZE POWDER FILLING
CAPPING AND LABELING LINE-P7

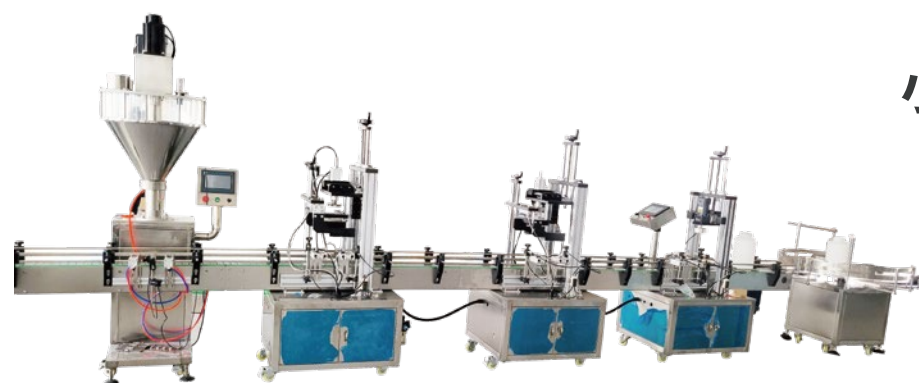

四头膏体 灌装旋盖机

FOUR HEADS
PASTE FILLING CAPPING LINE-P8



粉体混合 灌装封口线

AUTOMATIC POWDER
MIXING FILLING AND
SEALING LINE-P7



小瓶灌装旋盖 贴标生产线

VIALS FILLING
CAPPING LABELING LINE-P8






旋转膏体灌装旋盖机

ROTARY TYPE PASTE FILLING
CAPPING MACHINE-P9



铝盖灌装旋盖机

ALUMINUM CAPS FILLING
SEALING MACHINE-P10

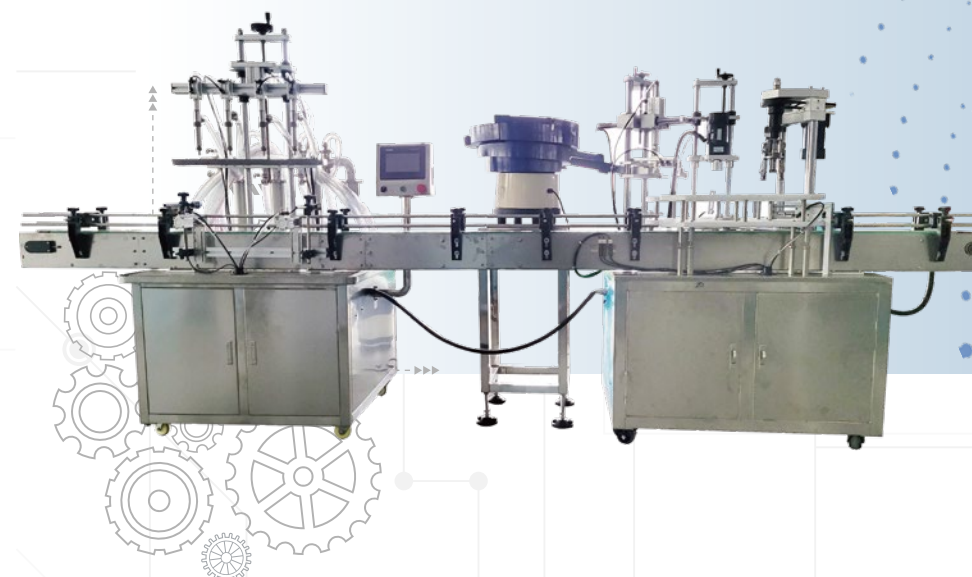

双头旋转 灌装旋盖机

DOUBLE HEADS ROTARY
FILLING CAPPING MACHINE-P9



转盘式铝盖旋盖机

ROTARY ALUMINUM CAPS
SEALING MACHINE-P10



小瓶带内塞 灌装旋盖线

SMALL BOTTLES FILLING
CAPPING LABELING MACHINE



转盘式上盖旋盖机

ROTARY CAPS COVERING AND
CAPPING MACHINE-P10





130 数控液体灌装机
130 CNC LIQUID FILLING MACHINE



160 数控灌装机
160 CNC LIQUID FILLING MACHINE



180 蠕动泵液体灌装机
180 PERISTALTIC PUMP LIQUID FILLING MACHINE



280 液体灌装机
280 LIQUID FILLING MACHINE

特点 FEATURES ▶

- 1、进口单片电机控制，不锈钢外壳，复合GMP要求。

2、LCD液晶显示屏，面板操作更加方便简单。

3、出料嘴防滴漏设计，灌装精度高，计量准确。

4、自动进行计数功能，有效控制灌装数量。
- 1, Imported single-chip motor control, stainless steel housing, composite GMP requirements.

2, LCD liquid crystal display, panel operation more convenient and simple

3, Outlet nozzle anti-drip design, filling high precision, accurate measurement

4, Automatic counting function, effective control of the number of filling.

> 技术参数 <				
型号 MODEL	X-Y 130	X-Y 160	X-Y 180	X-Y 280
电源 VOLTAGE	AV220V/110V			
功率 POWER	30w			
灌装范围 FILLING RANGE	5-3500ml			
最大流量 MAX FLOWER	3.2L/M			
灌装误差 FILLING ACCURATE	<0.5			
防滴漏功能 ANTI-DROP FUNCTION	Yes			
断电记忆功能 POWER OFF MEMORY FUNCTION	Yes			
整机重量 WEIGHT	4.5kg	8.5kg	5.5kg	3kg

170 单头磁力泵液体灌装机
170 SINGLE HEADMAGNETIC PUMP LIQUID FILLING MACHINE



170双头磁力泵液体灌装机
170 DOUBLE HEADMAGNETIC PUMP LIQUID FILLING MACHINE



170四头磁力泵液体灌装机
170 FOUR HEADMAGNETIC PUMP LIQUID FILLING MACHINE



特点 FEATURES ▶

- 1、采用世界品牌变频调速器，配以进口高精度多圈电位器及可锁式刻度盘，使流量调节稳定准确，误差负偏差小于0.5%，正偏差小于1.5%。进口不锈钢磁力齿轮泵，质量可靠寿命长；不锈钢机箱，坚固耐用；体积小，操作方便；

2、清洁方便；功能齐全，自动手动均可配流水线工作；

3、可配多个灌装头，常用机型有单头机、双头机、四头机；灌装量从1ml到10000ml可调，调节方便。
- 1, The Use Of The World Brand Frequency Governor, With Imported High-Precision Multi-Turn Potentiometer And Lockable Dial, So That The Flow Regulation Is Stable And Accurate, The Error Is Less Than 0.5% Negative Deviation, Positive Is Less Than 1.5%.Imported Stainless Steel Magnetic Gear Pump, Reliable Quality Long Life;Stainless Steel Chassis, Durable; Small Size, Easy To Operate;

2, Clean And Easy To Clean; Full Function, Automatic Manual Can Be Equipped With a Line On The Work;

3, Can Be Equipped With Multiple Filling Head, Commonly Used Models Are Single Head Machine, Double Head Machine And Four Head Machine;Filling From 1ml To 10000ml Adjustable, Easy To Adjust.

> 技术参数 <			
型号 MODEL	X-Y 170-1	X-Y 170-1	X-Y 170-1
灌装容量 FILLING VOLUME	1-10000ml,(it' s controlled by time)		
灌装头数 FILLING HEADS	Single heads	Double heads	4 heads
灌装速度 FILLING SPEED	10-25bottles/min	15-30bottles/min	40-60bottles/min
灌装精度 FILLING ACCURACY	±1.5%		
电压 VOLTAGE	220V		
功率 POWER	160w		
整机重量 WEIGHT	10kg	15kg	20kg

半自动腐蚀液体灌装机
X-YCP

CORROSIVE LIQUID
FILLING MACHINE



半自动香水灌装机
X-YP

SEMI-AUTOMATIC
PERFUME FILLING
MACHINE




单头液体气动活塞
灌装机X-Y1

LIQUID PNEUMATIC
PISTON FILLING
MACHINE



双头液体气动活塞
灌装机 X-Y2

LIQUID PNEUMATIC
PISTON FILLING
MACHINE



特点 FEATURES ▶

本系列灌装机是本公司参照国外先进灌装机技术进行改造和创新的产品,其结构更见简单合理,精确度高,操作更加简便。适用于医药、日化、食品、农药及特殊行业,是对高粘度流体、膏体进行灌装的理想设备。设计合理、机型小巧、操作方便,有灌装量调节手柄、灌装速度可进行任意调节,灌装精度高。灌装阀头采用防滴漏、防拉丝及升降灌装装置。本系列灌装机分为单头、双头和防爆式机型。

This series of filling machine is the company with reference to foreign advanced filling machine technology to transform and innovate the product,its structure is more simple and reasonable, high precision the operation is more simple.Applicable to medicine cosmetic food pesticide and special industries, is the high viscosity fluid, paste the idea equipment for filling.Reasonable design,small size, easy to operate, there are filling volume adjustment handle, filling speed can be adjusted filling high precision. Filling the valve head with anti-drip, anti-drawing and lifting filling device.This series of filling machine is divided into single head, double head and explosion-proof models.

> 技术参数 <

机器型号 MACHINE MODEL	X-Y	X-YP	X-YCP
灌装头数量 FILLING NOZZLES	1/2/4/6	2/4/6	2
灌装容量 FILLING VOLUME	5-5000ml	5-5000ml	
灌装速度 FILLING SPEED	25-30瓶/分钟 25-30 BPM		
功率 POWER	0.75KW		
电压 VOLTAGE	220V/110V		
气压 AIR PRESSURE	0.6-0.8MPA		

桌面气动膏体灌装机
X-A02

DESKTOP PNEUMATIC PASTE
FILLING
MACHINE



桌面手动膏体灌装机
X-A03

DESKTOP MANUAL PASTE
FILLING
MACHINE



A02/A03特点 FEATURES ▶

1手动灌装机采用活塞式结构,可对液体、膏体等物料进行5-50g定量灌装,该机结构紧凑、操作方便、计量精确。

A03 manual filling machine adopts piston type structure.which can do quantitative filling of 5-50g for liquids, pastes and other materials.The machine has a compact structure.convenient operation and accurate measurement.

A02/A03

> 技术参数 <

型号 MODEL	X-A02	X-A03
灌装头数量 FILLING NOZZLES	1	1
灌装容量 FILLING VOLUME	5-50ml	
灌装速度 FILLING SPEED	25-30瓶/分钟 25-30 BPM	25-50瓶/分钟 25-50 BPM
气压 AIR PRESSURE	0.6-0.8MPA	
料斗容量 HOPPER VOLUME	10L	
整机重量 MACHINE WEIGHT	12kg	15kg
机器尺寸 MACHINE SIZE	270*270*700MM	

气动活塞膏体灌装机
X-G1

PNEUMATIC PISTON PASTE
FILLING MACHINE



气动活塞膏体灌装机
X-G2

PNEUMATIC PISTON PASTE
FILLING MACHINE



X-G1/G2特点 FEATURES ▶

本系列灌装机是本公司参照国外先进灌装机技术进行改造和创新的产品,其结构更见简单合理,精确度高,操作更加简便。适用于医药、日化、食品、农药及特殊行业,是对高粘度流体、膏体进行灌装的理想设备。

This series of filling machine is the company with reference to foreign advanced filling machine technology to transform and innovate the product,its structure is more simple and reasonable, high precision the operation is more simple.

X-G1/G2

> 技术参数 <

型号 MODEL	X-G1	X-G2
灌装头数量 FILLING NOZZLES	1	2
灌装容量 FILLING VOLUME	5-5000ml	
灌装速度 FILLING SPEED	25-30瓶/分钟 25-30 BPM	
功率 POWER	0.75KW	
电压 VOLTAGE	220V/110V	
气压 AIR PRESSURE	0.6-0.8MPA	

半自动气动活塞吸嘴袋
膏体灌装机 X-GZLD

PNEUMATIC PISTON SPOUT
POUCH PASTE FILLING
MACHINE




气动活塞膏体灌装机带
工作平台 X-G

PNEUMATIC PISTON PASTE
FILLING MACHINE WITH
WORKING PLATFORM



气动活塞膏体灌装机带
横向搅拌料斗 X-G

PNEUMATIC PISTON PASSTE
FILLING MACHINE WITH
MIXER HOPPER

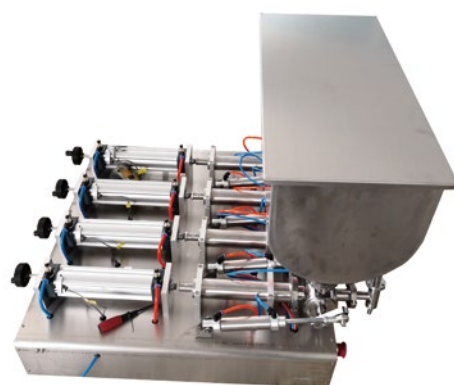

全自动齿轮泵
灌装机 X-GP

AUTOMATIC GEAR
PUMP FILLING
MACHINE



全自动转子泵灌装机 X-RP

AUTOMATIC ROTOR PUMP
FILLING MACHINE



> X-GP技术参数 <

灌装头数量 FILLING NOZZLES	1
机器泵 PUMP	Gear pump
适用范围 APPLICATION	It' s suitable for filling different thick liquid, such as cream, oil and others.
灌装容量 FILLING VOLUME	1-10L, no limited, it' s depends on time.
灌装速度 FILLING SPEED	25-30瓶/分钟 25-30 BPM
功率 POWER	0.75KW
电压 VOLTAGE	220V/110V
气压 AIR PRESSURE	0.6-0.8MPA

气动活塞膏体灌装机带
支架和加热 X-G

PNEUMATIC PISTON PASTE
FILLING MACHINE WITH
STANDARD



气动活塞液体灌装机带
工作平台 X-Y

PNEUMATIC PISTON LIQUID
FILLING MACHINE WITH
WORKING PLATFORM



>X-RP技术参数 <

灌装头数量 FILLING NOZZLES	1
机器泵 PUMP	Gear pump
适用范围 APPLICATION	It' s suitable for filling different thick liquid, such as cream, oil and others.
灌装容量 FILLING VOLUME	1-10L, no limited, it' s depends on time.
灌装速度 FILLING SPEED	25-30瓶/分钟 25-30 BPM
功率 POWER	0.75KW
电压 VOLTAGE	220V/110V
气压 AIR PRESSURE	0.6-0.8MPA

> X-GZLD技术参数 <

灌装头数量 FILLING NOZZLES	1/2/4/6
灌装容量 FILLING VOLUME	5-100ml/10-100ml/50-500ml 100-1000ml/300-3000ml 1000-5000ml
灌装速度 FILLING SPEED	25-30瓶/分钟 25-30 BPM
适用吸嘴尺寸 SUITABLE SPOUT SIZE	Customized
功率 POWER	0.75KW
电压 VOLTAGE	220V/110V
气压 AIR PRESSURE	0.6-0.8MPA

立式膏液灌装机 X-GV

AUTOMATIC VERTICAL PASTE LIQUID FILLING MACHINE



立式膏液灌装机配加热料斗 X-GV

AUOTMATIC VERTICAL PASTE LIQUID FILLING MACHINE WITH HEATING DEVICE



立式膏液灌装机配输送带 X-GV

AUTOMATIC VERTICAL PASTE LIQUID FILLING MACHINE WITH BELT



全自动气动活塞膏体灌装机 X-GA

FULL AUTOMATIC PASTE FILLING MACHINE



全自动气动活塞液体灌装机 X-YA

FULL AUTOMATIC PNEUMATIC PISTON LIQUID FILLING MACHINE



双头立式膏液灌装机 X-GV

DOUBLE HEADS PASTE LIQUID FILLING MACHINE





性能特色 FEATURES ▶

本系列液体灌装机适用于日化、食品、油脂、医药、农药等行业，可灌装不同类型的液体类产品。采用活塞注射式灌装，三通单向阀装置，具有灌装精度高、安装调试方便、清洗保养简便、无滴漏等优点。与物料接触部分均采用304不锈钢制成(可定制316L不锈钢)，全不锈钢机架，具有整洁干净外观优美大方等特点。采用台湾PLC控制、触摸屏人机界面，可选配德国sicK光眼，德国FESTO，台湾AirTac等进口元件，使灌装机具有性能稳定、操作灵活的卓越性能。

This series of liquid filing machine for daily,food, oil, medicine, pesticides and other industries, can be filled with different types of liquid products Piston-type linear filing with high precision filing, easy installation and commissioning, cleaning and maintenance is simple, no dripping and so on, Contact with the material are made of304 stainless steel (custom 316L stainless steel, all stainless steel rack, with clean and beautiful and beautiful appearance and so on. Using Taiwan PLC control,touch screen man-machine interface,the German sick light eyes Germany FESTO, Taiwan AirTac and other imported components, so that the filing machine has a stable performance, flexible operation of the outstanding performance.

> 技术参数 <					
型号 MODEL	X-GV100	X-GV200	X-GV300	X-GV500	X-GV1000
灌装量 MODEL	5-100	10-200	30-300	50-500	100-1000
灌装精度 FILLING PRECISION	<±1.5				
生产能力 FILLING SPEED	1-30				
配用气量 AIR CONSUMPTION	>0.1				
配用气压 AIR PRESSURE	0.4				
外形尺寸 MACHINE SIZE	442X440X1580	442X440X1580	442X440X1580	442X440X1680	442X440X1680
重量 MACHINE WEIGHT	50	50	50	60	70

> 技术参数 <	
功率 POWER	500W
电源 VOLTAGE	220V/110V
气压 AIR PRESSURE	0.6-0.8mpa
速度 SPEED	5-60瓶/分 (BPM)
灌装精度 FILLING PRECISION	±1%
灌装容量 FILLING RANGE	10-5000ml
灌装头数 FILLING NOZZLES	2/4/6/8/10/12 可定制 (can be customized)



全自动磁力泵灌装机

X-YA-M

全自动伺服灌装机

X-GA-S

全自动单头转子泵灌装机 X-GA-R

功率 | POWER

500W

电源 | VOLTAGE

220V/110V

气压 | AIR PRESSURE

0.6-0.8mpa

速度 | VSPEED

5-60瓶/分(BPM)

灌装精度 | FILLING PRECISION

$\pm 1\%$

灌装容量 | FILLING RANGE

10-5000ml

灌裝頭數 | FILLING NOZZLES

4

700 全自动粉体
灌装机 X-F700

AUTOMTIC POWDER
FILLING MACHINE



性能及特点 FEATURES ▶

- 1、设备材质为优质304不锈钢,符合GMP要求;

2、设备出料口有吸尘装置,外围有防尘罩;

3、容器自动定位,自动充填物料;

4、PLC触摸屏控制系统,操作简单,伺服系统计量,灌装量和灌装速度均可任意调节,精度高;

5、可自动显示包装数量,可方便的统计出机器的工作量。
- 1、 The equipment material for the quality of 304 stainless steel,in line with GMP requirements;

2、 The device outlet with a vacuum device,the external dust cover.

3、 The container automatically positioning,automatic filling materials;

4、 PLC touch the filing volume and filling speed can be adjusted arbitrarily with high precision.

5、 Can automatically display the number of packaging, can be convenient to calculate the workload of the machine.

> 技术参数 <

型号 MODEL	X-F 700
电源 VOLTAGE	220V/110V 50-60hz
功率 POWER	1.8kw
灌装范围 FILLING RANGE	1-6000G
灌装精度 FILLING PRECISION	<5%
灌装速度 FILLING SPEED	35-45 BPM
料斗容量 HOPPER VOLUME	75L
机器尺寸 MACHINE SIZE	3000*1060*2000mm
重量 WEIGHT	150kg

710粉体灌装机 X-F
710 AUTOMATIC POWDER
FILLING MACHINE



720粉体灌装机 X-F
720 AUTOMATIC POWDER
FILLING MACHINE



730 粉体灌装机 X-F
730 POWDER FILLING
MACHINE



桌面粉体灌装机 X-FD
DESKTOP POWDER
FILLING MACHINE



> 技术参数 <

型号 MODEL	X-F 710	X-F 720	X-F 730	X-FD
灌装范围 FILLING RANGE	1-1000G	1-1000G	1-5000G	1-100G
灌装精度 FILLING PRECISION	<5%			
灌装速度 FILLING SPEED	35-45 BPM			
电源 VOLTAGE	220V/110V 50-60hz			
功率 POWER	1.5kw			750W
重量 WEIGHT	150kg			
料斗容量 HOPPER VOLUME	6L	25L	30L	5L
机器尺寸 MACHINE SIZE	500*400*1000mm	900*900*2000mm	1050*900*2000mm	400*500*930mm

X-XG 1035 手动扎盖机

X-XG 1035 MANUAL CAPS
SEALING MACHINE



X-XG80 半自动香水瓶扎盖机

X-XG80 SEMI-AUTOMATC PERFUME
BOTTLES CAPPING MACHINE



X-XG90 气动压盖机

X-XG90 PNEUMATIC CAPS
PRESSING MACHINE



X-XG DK50 桌面金属盖锁口机

X-XG DK50 ALUMINUM CAPS
SEALING MACHINE




X-XG450 桌面单头旋盖机

X-XG450 SINGLE HEAD
CAPPING MACHINE



X-XG6100 桌面四轮搓盖机

X-XG6100 FOUR HEADS
CAPPING MACHINE

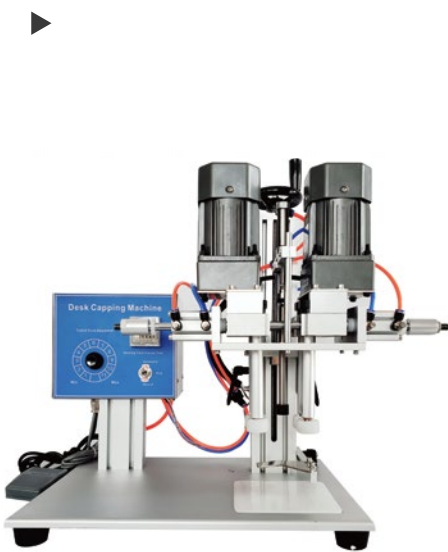

> 技术参数 <			
型号 Model	X-XG1035	X-XG80	X-XG90
工作方式 DRIVEN TYPE	Electric+Manual	Pneumatic	
电源 VOLTAGE	220V/110V 50hz	0	
功率 POWER	50w	0	
封口直径 CAPPING DIAMETER	10-35mm		
瓶盖高度 CAPS HEIGHT	5-20mm		
适用瓶高 APPLICATION BOTTLES HEIGHT	30-180mm		
旋盖速度 CAPPING SPEED	15-20bottles		
机器重量 MACHINE WEIGHT	20kg	25kg	15kg
整机尺寸 MACHINE SIZE	350*250*650mm		350*350*650mm

> 技术参数 <			
型号 Model	X-XG DK50	X-XG450	X-XG6100
工作方式 DRIVEN TYPE	Electric		Pneumatic+Manual
电源 VOLTAGE	220V/110V 50hz		
功率 POWER	370w	Electric+Manual	50w
封口直径 CAPPING DIAMETER	20-40mm	10-50mm	
瓶盖高度 CAPS HEIGHT	Customized		
适用瓶高 APPLICATION BOTTLES HEIGHT	100-330mm	40-200mm	
旋盖速度 CAPPING SPEED	20-25BPM		25-30BPM
机器重量 MACHINE WEIGHT	65KG	32kg	30KG
整机尺寸 MACHINE SIZE	620*260*1000mm	520*300*530mm	670*370*580mm

X-XG3500 桌面全自动旋盖机

X-XG3500 AUTOMATIC
DESKTOP CAPPING
MACHINE




X-XG-P 全自动压盖机

X-XG-P AUTOMATIC CAPS
PRESSING MACHINE



X-XG4500 全自动搓盖机

X-XG4500 AUTOMATIC FOUR
CAPS CAPPING MACHINE

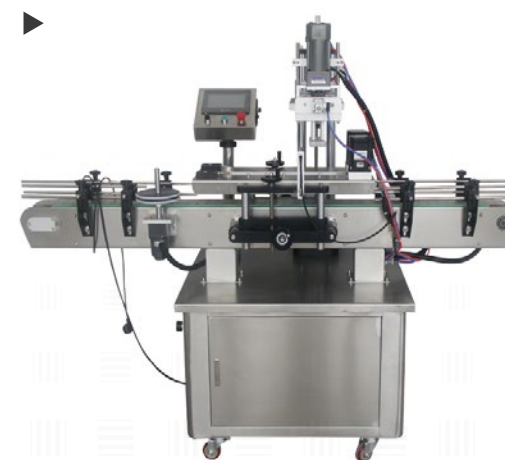

X-XG5500 六轮高速旋盖机

X-XG5500 6 HEADS HIGH SPEED
CAPPING MACHINE



性能及特点 FEATURES ▶

- 1、电气控制运动,稳定性强;设有定位装置,旋盖标准,操作方便;锁盖范围宽,可锁不同。
- 2、形状规格的瓶盖;解决了喷头、泵头、喷雾泵、手扣式喷枪旋盖难的问题;锁盖转速可调。
- 3、可根据不同瓶盖调节松紧度。
- 4、用于各种日化、医药、化工行业的喷头/泵头/喷雾泵/手扣式喷枪的瓶盖锁盖机械。


1. Electrical control movement, strong stability: with positioning device, screw cap standard, easy to operate; lock cover a wide range, can lock different
2. Shape specifications of the cap; to solve the nozzle, pump heads pray pump, hand button spray guns difficult to solve the problem: lock cover adjustable speed.
3. Can be adjusted according to different caps tightness.
4. For a variety of daily chemical, pharmaceutical, chemical industry nozzle/pump head/spray pump hand button gun cap lid cover machinery.

> 技术参数 <

型号 Model	X-XG3500	X-XG-P
工作方式 DRIVEN TYPE	Automatic	
电源 VOLTAGE	220V/110V 50hz	
功率 POWER	500w	450w
封口直径 CAPPING DIAMETER	10-60mm	
瓶盖高度 CAPS HEIGHT	Customized	
适用瓶高 APPLICATION BOTTLES HEIGHT	30-190mm	
旋盖速度 CAPPING SPEED	30-50bottles	
机器重量 MACHINE WEIGHT	75kg	180kg
整机尺寸 MACHINE SIZE	1070*550*750mm	1500*1400*2000mm

> 技术参数 <

型号 Model	X-XG4500	X-XG5500
工作方式 DRIVEN TYPE	Automatic	
电源 VOLTAGE	220V/110V 50hz	
功率 POWER	1.2kw	1.5kw
封口直径 CAPPING DIAMETER	10-60mm can be customized	
瓶盖高度 CAPS HEIGHT	Customized	
适用瓶高 APPLICATION BOTTLES HEIGHT	30-190mm	
旋盖速度 CAPPING SPEED	30-50bottles/min	20-100bottles/min
机器重量 MACHINE WEIGHT	280KG	550kg
整机尺寸 MACHINE SIZE	2000*1400*2000mm	2000*850*1800mm

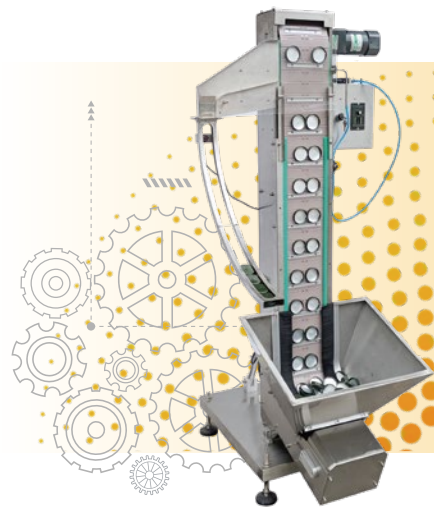


挂盖机

CAPS COVERING MACHINE

全自动挂盖旋盖机

AUTOMATIC CAP COVERING
CAPPING MACHINE

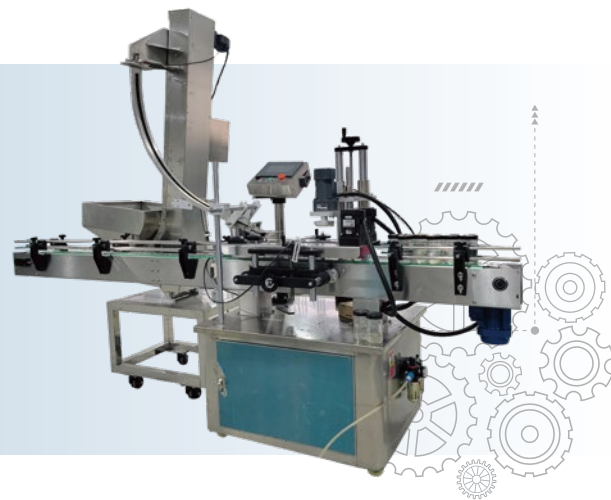

全自动挂盖压盖机

AUTOMATIC CAPS COVERING AND
PRESSING MACHINE

全自动落盖旋盖机

AUTOMATIC CAPS COVERING
AND CAPPING MACHINE



X-XG-V100 桌面真空旋盖机

X-XG-V100 DESKTOP VACUUM
CAPPING MACHINE



X-XG-V200 立式真空旋盖机

X-XG-V200 VERTICAL VACUUM
CAPPING MACHINE



X-XG-V300 全自动真空旋盖机

X-XG-V300 AUTOMATIC VACUUM
CAPPING MACHINE



性能及特点 FEATURES ▶

本机广泛适用于食品，罐头，调味品，保健品等行业中三(四)旋马口铁盖玻璃瓶的真空旋盖作业，可有效的延长产品的保质期，真空旋盖已经成为现代瓶装食品生产的趋势。

This machine is widely used in food, canned goods, condiments health products and other industries. The vacuum capping operation of three (four) rotary tinplate glass bottles can prolong the shelf life of products effectively. Vacuum capping has become the trend of modern bottled food production.

> 技术参数 <

型号 Model	X-XG4500	X-XG-V200	X-XG-V300
适用瓶径 APPLICABLE BOTTLE DIAMETER	φ30-φ85mm		
适用瓶高 APPLICABLE BOTTLE HEIGHT	80-250mm		
适用瓶盖 APPLICABLE CAP	φ38-φ55mm		
旋盖速度 CAPPING SPEED	500-600BPH		1000-2000BPH
气源压力 AIR SOURCE PRESSURE	0.6~0.8 MPa		
耗气量 AIR CONSUMPTION	60L/Min	80L/Min	100L/Min
电源 POWER SUPPLY	AC 220/110 50zh		
总功率 TOTAL POWER	0.75 kW	1.5 kW	3.5 kW
重量 WEIGHT	About 80 kg	About 220 kg	About 700 kg
外形尺寸 DIMENSIONS	600*800*500mm	750*650*1500mm	3000*1000*1900mm

X-XG-C100 桌面铝罐封口机
X-XG-C100 DESKTOP AUTOMATIC
ALUMINUM CANS SEALING MACHINE



X-XG-C200 立式铝罐封口机
X-XG-C200 VERTICAL CANS
SEALING MACHINE



X-XG-C300 全自动封罐机
X-XG-C300 AUTOMATIC CANS
SEALING MACHINE



X-TB 130 圆瓶贴标机
X-TB80 ROUND BOTTLES
LABELING MACHINE



X-TB80 圆瓶贴标机
X-TB80 ROUND BOTTLES
LABELING MACHINE



X-TB190 圆瓶贴标机
X-TB190 ROUND BOTTLES
LABELING MACHINE



性能及特点 FEATURES ▶

适用于马口铁罐、铝合金罐、纸罐等各种圆形罐的封口，操作简便、易学，是食品、饮料、制药等行业的理想设备。

It is suitable for sealing all kinds of round cans, such as tinplate cans, aluminum alloy cans, paper cans, etc. It is easy to learn and easy to learn. It is an ideal equipment for food, beverage, pharmaceutical and other industries.

> 技术参数 <			
型号 Model	X-XG-C100	X-XG-C200	X-XG-C300
封罐头数 SEALING HEADS	1		
封罐速度 SEALING SPEED	10-20bpm	15-25pbm	25-40bpm
封罐高度 SEALING HIGHT	40-200mm		
适用罐子直径 APPLICATION CANS DIAMETER	30-200mm		
电源 POWER	AC 220v/110v 50hz		
包装尺寸 MACHINE SIZE	730*600*380mm	800*550*150mm	3000*1000*1500mm
重量 WEIGHT	50kg	120kg	280kg




> 技术参数 <			
型号 Model	X-TB80	X-TB130	X-TB190
电源 VOLTAGE	AC220V 50Hz/110V 60Hz		
功率 VOLTAGE POWER	150W		
贴标速度 LABEL SPEED	25-50Pcs/min		
贴牆待每标精度 LABEL ACCURACY	±1mm		
标签卷内径 LABEL ROLL INNER DIAMETER	>Φ75mm		
标签卷最大外径 MAX LABEL ROLL OUT DIAMETER	≤Φ250mm	≤Φ300mm	≤Φ250mm
适用瓶子直径 APPLICATION BOTTLES DIAMETER	Φ40mm-100mm	Φ25mm-125mm	Φ40mm-100mm
标签宽度 WIDE OF LABEL	W150xL180mm	W30*L400mm	W200*300mm
整机尺寸 MACHINE SIZE	600*300*400mm	650*600*900mm	760*540*380cm
整机重量 TOTAL WEIGHT	38kg	45kg	38kg



X-TB50 SEMI-AUTOMATIC ROUND BOTTLES LABELING MACHINE



X-TB60 SEMI-AUTOMATIC SQUARE BOTTLES LABELING MACHINE

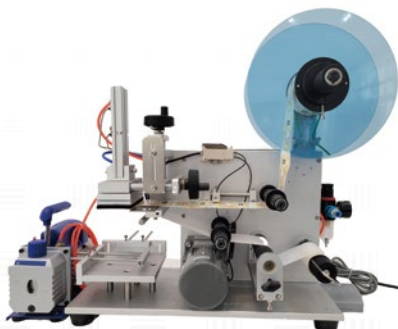

X-TB61 SQAURE BOTTLES
LABELING MACHINE



XYZ
MACHINERY

> 技术参数 <

型号 Model	X-TB50	X-TB60	X-TB61
电源 VOLTAGE	AC220V 50Hz/110V 60Hz		
功率 POWER	150W		
贴标速度 LABEL SPEED	25-50Pcs/min		
贴标待每标精度 LABEL ACCURACY	±1mm		
标签卷内径 LABEL ROLL INNER DIAMETER	>Φ75mm		
标签卷最大外径 MAX LABEL ROLL OUT DIAMETER	≤Φ250mm	≤Φ300mm	≤Φ250mm
适用瓶子直径 APPLICATION BOTTLES DIAMETER	Φ40mm-100mm	Φ25mm-125mm	Φ40mm-100mm
标签宽度 WIDE OF LABEL	W150xL180mm	W30*L400mm	W200*300mm
整机尺寸 MACHINE SIZE	600*300*400mm	650*600*900mm	760*540*380cm
整机重量 TOTAL WEIGHT	38kg	45kg	38kg

X-TB160 ROUND BOTTLES LABELING MACHINE



X-TB180 ROUND BOTTLES LABELING MACHINE



X-TB301 AUTOMAITC FOUR SIDE LABELING MACHINE



XYZ
MACHINERY

> 技术参数 <

型号 Model	X-TB301	X-TB150	X-TB180
电源 VOLTAGE	AC220V 50Hz/110V 60Hz		
功率 POWER	400W		
贴标速度 LABEL SPEED	25-50Pcs/min		
贴标待每标精度 LABEL ACCURACY	±1mm		
标签卷内径 LABEL ROLL INNER DIAMETER	>Φ75mm		
标签卷最大外径 MAX LABEL ROLL OUT DIAMETER	≤Φ250mm		
适用瓶子直径 APPLICATION BOTTLES DIAMETER	Φ40mm-100mm		
标签宽度 WIDE OF LABEL	W150xL180mm		
整机尺寸 MACHINE SIZE	130x80x80cm		
整机重量 TOTAL WEIGHT	130kg		

X-TB160 全自动桌面
平面贴标机

X-TB160 AUTOMATIC FLAT
LABELING MACHINE

X-TB170 全自动桌面
卧式贴标机

X-TB170 AUTOMATIC TUBE
LABELING MACHINE

X-TB190 桌面全自动
双面贴标机

X-TB190 AUTOMATIC
DOUBLE SIDE LABELING
MACHINE

X-TB220
全自动圆瓶贴标机

X-TB220 AUTOMATIC
ROUND BOTTLES
LABELING
MACHINE

X-TB260
全自动圆瓶定点贴标机

X-TB260 AUTOMATIC ROUND
BOTTLES POSITION
LABELING MACHINE



性能及特点 FEATURES ▶

- 1、全自动圆形滚动贴标机属于圆瓶贴标机,适用于制药、食品、日化等行业的圆瓶贴标,可贴全周贴标和半圆周贴标。
- 2、可选配自动转盘理瓶机,可直接连接前端生产线,自动送瓶进入贴标机,增加效率。
- 3、可选配配置色带打码贴标机,可在线打印生产日期和批号,减少瓶子包装工序,提高生产效益。

- 1. Automatic circular rolling labeling machine is a round bottle labeling machine, suitable for pharmaceutical, food, cosmetic and other industries round bottle labeling, paste all week labeling and semi-circular labeling.
- 2. Optional automatic transfer bottle management machine, can be directly connected to the front-end production line, automatic bottles into the labeling machine, increase efficiency.
- 3. Optional Ribbon coding labeling machine can be printed on-line production date and batch number, reduce the bottle packaging process,improve production efficiency.

> 技术参数 <			
型号 Model	X-TB160	X-TB170	X-TB190
电源 VOLTAGE	AC220V 50Hz/110V 60Hz		
功率 VOLTAGE POWER	240W		
贴标速度 LABEL SPEED	25-50Pcs/min		
贴标精度 LABEL ACCURACY	±1mm		
标签卷内径 LABEL ROLL INNER DIAMETER	>Φ75mm		
标签卷最大外径 MAX LABEL ROLL OUT DIAMETER	≤Φ250mm		
适用瓶子直径 APPLICATION BOTTLES DIAMETER	Φ40mm-100mm		
标签宽度 WIDE OF LABEL	W150xL180mm		
整机尺寸 MACHINE SIZE	130*80*100cm		190*110*135cm
整机重量 TOTAL WEIGHT	130kg	135kg	250kg

> 技术参数 <		
型号 Model	X-TB220	X-TB260
机器尺寸 MACHINE SIZE	2000X950X1400MM ADJUSTABLE	2000X1000X1400MM
贴标速度 SPEED	20-200pcs	25-50PCS/min
适合瓶型直径 SUITABLE DIAMETER OF BOTTLES	Φ30-100mm	
标签高度 LABEL HEIGHT	15-150mm	
标签长度 LABEL LENGTH	25-300mm	15-200mm
标签精度 LABEL ACCURACY	±1%	
标签卷内径大小 INNER DIAMETER OF LABEL ROLL	76mm	
标签卷外径大小 LABEL ROLL OUTER DIAMETER	350	
电源电压 VOLTAGE	110V/220V1.5KW50/60Hz	
机器重量 NET WEIGHT	200kg	220kg
包装尺寸 PACKAGE SIZE	2150*1000*1600mm	2150*1050*1600mm

X-TB300 全自动立式平面贴标机

X-TB300 AUTOMATIC VERTICAL
FLAT LABELING MACHINE



X-TB330 全自动立式贴标机

X-TB330 AUTOMATIC TUBE
LABELING MACHINE



X-TB600 全自动双面贴标机

X-TB600 AUTOMATIC DOUBLE SIDE
LABELING MACHINE



X-TB610 半自动双面贴标机

X-TB610 SEMI-AUTOMATIC
DOUBLE SIDE LABELING
MACHINE



> 技术参数 <

型号 Model	X-TB300	X-TB330
机器尺寸 MACHINE SIZE	2000*800*1600mm	2000*900*1500mm
贴标速度 SPEED	60-150Pcs/min	50-300pcs adjustable
适合瓶型直径 SUITABLE DIAMETER OF BOTTLES	≤180mm	18-21mm
标签高度 LABEL HEIGHT	15-200mm	
标签长度 LABEL LENGTH	25-300mm	15-80mm
标签精度 LABEL ACCURACY	±1%	
标签卷内径大小 INNER DIAMETER OF LABEL ROLL	76mm	
标签卷外径大小 LABEL ROLL OUTER DIAMETER	350mm	
电源电压 VOLTAGE	220V 1.5KW50/60Hz	110V/220V 1.5KW50/60HZ
机器重量 NET WEIGHT	180kg	195kg
包装尺寸 PACKAGE SIZE	2100*850*1600mm	2150*950*1800mm

> 技术参数 <

型号 Model	X-TB600	X-TB610
机器尺寸 MACHINE SIZE	2800*1650*1500mm	1220*1250*1470mm
贴标速度 SPEED	50-100Pcs/min	15-25Pcs/min
适合瓶型直径 SUITABLE DIAMETER OF BOTTLES	≤101mm	Length: 20-300mm, Height: 50-350mm, Width: 20-200mm
标签高度 LABEL HEIGHT	15-200mm	
标签长度 LABEL LENGTH	25-300mm	15-170mm
标签精度 LABEL ACCURACY	±1%	±0.5%
标签卷内径大小 INNER DIAMETER OF LABEL ROLL	76mm	
标签卷外径大小 LABEL ROLL OUTER DIAMETER	350mm	300mm
电源电压 VOLTAGE	110V/220V 3.5KW50/60Hz	220V 50Hz
机器重量 NET WEIGHT	450kg	270kg
包装尺寸 PACKAGE SIZE	2300*1300*1900mm	1220*1250*1470mm

Steam generator



Steam heating shrinking tunnel



X-TB620 全自动套标机

X-TB620 AUTOMATIC SHRINKING LABELING MACHINE



性能及特点FEATURES

- 1, 单收缩标签供料盘, 微电脑自动控制、自动检测、自动定位, 换标快速、省力, 切断位置精准。

2, 电器配置说明:此机采用了高速机同等PLC及定位模块和伺服电机及变频器, 触摸屏自动控制, 操作简单。

3, 适用瓶型:圆瓶、方瓶、扁瓶、曲线瓶、怀型等。
- 1, Single shrink label for the tray,microcomputer automatic control,automatic detection,automatic positioning,for fast,effort,cut off the precise location.

2, Electrical configuration instructions:This machine uses a high speed machine equivalent PLC and positioning module and servo motor and inverter,touch screen automatic control simple operation.

3, For bottle type: Round bottles,square bottles, flat bottles,curved bottles,pregnant and so on.

> 技术参数 <	
型号 Model	X-TB620
输入功率 POWER	2.0KW
输入电压 VOLTAGE	380/220V AC
生产效率 PRODUCTION EFFICIENCY	100-150BPH
主机尺寸 MACHINE SIZE	L2100*W1050*H2000mm
适用瓶身直径 APPLICATION BOTTLES DIAMETER	Φ26-130
适用标签长度 APPLICATION LABELS LENGTH	30-260mm
适用标签厚度 APPLICATION LABELS THICKNESS	0.03-0.13mm
重量 MACHINE WEIGHT	400kg

平面贴标机带分页器

AUTOMATIC VERTIC FLAT LABELING MACHINE WITH AUTOMATIC FEEDER



全自动三面贴标机 XYZ

AUTOAMTIC THREE SIDE LABELING MACHINE



移动式立式平面贴标机

VERTICAL FLAT LABELING MACHINE





X-S150 FILMS SEALING MACHINE



X-S900 FILMS SEALING MACHINE



X-S900 FILMS SEALING MACHINE



X-S FILMS SEALING MACHINE

X-S1200 FILMS SEALING MACHINE



X-S1300 FILMS FLUSHING SEALING MACHINE



> 技术参数 <

型号 Model	X-S1100	X-S1200	X-S1300
电源电压 VOLTAGE	220V/110V 50hz		
功率 POWER	600w		
封口速度 SEALING SPEED	0-13m/分		
封口宽度 SEALING WIDTH	6-15mm		
封口厚度 SEALING THICKNESS	0.02-0.8mm		
温控范围 TEMPERATURE RANGE	0-300℃		
输送承载 TRANSPORT BEARING	5kg		
机器尺寸 MACHINE SIZE	920*380*620mm	1050*380*620mm	920*380*6500mm
机器重量 MACHINE WEIGHT	35kg		50kg

X-S-DC500 电磁感应封口机

X-S-DC500 INDUCTION
SEALING MACHINE



X-S-DC1500 电磁感应封口机

X-S-DC1500 INDUCTION
SEALING MACHINE



X-S-DC6000 电磁感应封口机

X-S-DC6000 INDUCTION
SEALING MACHINE



> 技术参数 <			
型号 Model	X-S-DC500	X-S-DC6000	X-S-DC1500A
电源电压 VOLTAGE	220V/110V 50hz	1220V 50/60Hz	
功率 POWER	500w	600w	1.5kw
封口速度 SEALING SPEED	0-50BPM	0-8m/Min	0-10m/min
封口直径 SEALING DIAMETER	20-100mm	20-80mm	20-50mm
适用瓶高 APPLICABLE BOTTLE HEIGHT	No limited	80-300mm	40-200mm
机器重量 MACHINE WEIGHT	5kg	6kg	38kg
整机尺寸 MACHINE SIZE	340*290*150mm	1120*470*590mm	1150*480*400mm

X-S-DC2000A 电磁感应封口机

X-S-DC2000A INDUCTION
SEALING MACHINE



X-S-DC2300S 电磁感应封口机

X-S-DC2300S INDUCTION
SEALING MACHINE



X-S-DC2500B 电磁感应封口机

X-S-DC2300S INDUCTION
SEALING MACHINE



> 技术参数 <			
型号 Model	X-S-DC2000A	X-S-DC2500B	X-S-DC2300S
电源电压 VOLTAGE	220V 50/60Hz		
功率 POWER	1.5kw	2.5kw	
封口速度 SEALING SPEED	0-12m/min		
封口直径 SEALING DIAMETER	20-130mm	20-50mm	
适用瓶高 APPLICABLE BOTTLE HEIGHT	40-300mm		
机器重量 MACHINE WEIGHT	72kg	164kg	164kg
整机尺寸 MACHINE SIZE	1550*550*1350mm	3000*1100*2300mm	

X-S-V260 台式真空封口机

X-S-V260 DESKTOP VACUUM SEALING MACHINE



X-S-VS 立式单室真空封口机

X-S-VS VERTICAL SINGLE ROOM VACUUM SEALING MACHINE



性能及特点 FEATURES ▶

荣源真空机适用于包装中、小物件,可以单件或多件包装,适用于小规模连续工作工作效率高,可以加充气功能;

Our vacuum packaging machine can package medium and small objects, and can package single or multiple pieces. It is suitable for small-scale continuous work with high work efficiency and can be equipped with an inflation function;

> 技术参数 <				
型号 Model	X-S-V 260	X-S-VS 400	X-S-VS 500	X-S-VS 600
电源电压 VOLTAGE	380V/220V/110V 50HZ			
电机功率 MOTOR POWER	370w	750w	1500w	
热封功率 SEALING POWER	200w	500w	750w	1000w
真空室压强 VACUUM PRESSURE	1KPA			
热封条数 SEALING BARS	2			
真空室尺寸 CHAMBER DIMENSION	385*380*90mm	430*420*130mm	530*520*130mm	650*620*180mm
热封条长度 SEALING LENGTH	260mm	400mm	500mm	600mm
热封宽度 SEALING WIDTH	8mm	10mm		
真空泵排气量 VACUUM PUMP RATE	20m³/H			40m³/H
真空室材质 MATERIAL FOR VACUUM CHAMBER	SUS			
外形尺寸 MACHINE SIZE	480*330*360mm	540*500*950mm	580*630*1000mm	750*710*960mm
净重 MACHINE WEIGHT	35kg	110kg	125kg	150kg

X-S-VD 双室真空封口机

X-S-VD DOUBLE ROOM VACUUM SEALING MACHINE



> 技术参数 <

型号 Model	X-S-V 260	X-S-VS 400	X-S-VS 500
电源电压 VOLTAGE			
真空泵电机功率 MOTOR POWER	750w	1500w	
热封功率 SEALING POWER	500w	750w	1000w
真空室最低绝对压强 ULTIMATE VACUUM PRESSURE	1KPA		
热封条数 SEALING BARS	4	2	4
真空室尺寸 CHAMBER DIMENSION	445*500*45mm	572*545*45mm	670*545*45mm
热封条长度 SEALING LENGTH	400mm	500mm	600mm
热封宽度 SEALING WIDTH	10mm		
真空泵排气量 VACUUM PUMP RATE	20m³/H	40m³/H	
真空室材质 MATERIAL FOR VACUUM CHAMBER	SUS		
外形尺寸 MACHINE SIZE	995*630*905mm	1250*690*950mm	1450*690*950mm
净重 MACHINE WEIGHT	220kg	225kg	250kg

XYZ 脚踏封口机

XYZ FEET PRESS SEALING MACHINE



XYZ 外抽真空机

DESKTOP VACUUM SEALING MACHINE



XYZ 桌面薄膜封口机

DESKTOP FILMS SEALING MACHINE



XYZ 桌面真空机

DESK VACUUM SEALING MACHINE



X-S-ZH4030 封箱机

X-S-H4030 CATON BOX
SEALING MACHINE



X-S-ZH5050 封箱机

X-S-H5050 CATON BOX
SEALING MACHINE



X-S-ZH6050 封箱机

X-S-H6050 CATON BOX
SEALING MACHINE



X-S-ZH4030P 封箱机带打包机

X-S-H4030P CATON BOX SEALING
MACHINE WITH BALDER



X-S-ZH5050P 气动折盖封箱机

X-S-ZH5050P PNEUMATIC FLOD
SEALING MACHINE



X-S-ZH6050P 气动折盖封箱机

X-S-ZH6050P PNEUMATIC FLOD
SEALING MACHINE




> 技术参数 <			
型号 Model	X-S-ZH4030	X-S-ZH5050	X-S-ZH6050
输送速度 CONVEYING SPEED	0-18m/min	0-20m/min	
最大包件尺寸 MAX PACKAGING SIZE	W300*H400mm	W500*H500mm	W500*H600mm
最小包件尺寸 MIN PACKAGING SIZE	W80*H90mm	W500*H110mm	W500*H100mm
电源 POWER	220V/50Hz		
耗电功率 POWER CONSUMPTION	180W		
胶带宽 FILM WIDTH	1/1.5/2.5		
外包装尺 DIMENSION	1100*W650*800mm	990*W700*1430mm	1600*W740*1590mm
机器重量 MACHINE WEIGHT	125kg	138kg	145kg
工作高度 WORKING HEIGHT	700±0mm		

> 技术参数 <			
型号 Model	X-S-ZH4030P	X-S-ZH5050P	X-S-ZH5050P
电封箱宽度 POWER	200-500mm (48mm tape applicator)	150-500mm (48mm tape applicator)	200-500mm (48mm tape applicator)
封箱高度 SEALING HEIGHT	180-600mm	150-500mm	180-600mm
封箱长度 SEALING LENGTH	200mm-No limited	150mm-No limited	200mm-No limited
台面高度 TABLE HEIGHT	570-730mm		
封箱速度 SEALING SPEED	0-18m/min		
适用电源 APPLICABLE POWER	220v 50Hz		
功率 POWER	180W		
外形尺寸 DIMENSIONS	L1000*W830*H1350mm (excluding front and rear roller racks)	L1060*W830*H1240mm (excluding front and rear roller racks)	L1000*W830*H1350mm (excluding front and rear roller racks)

XYZ 封箱机带边封机

AUTOMATIC CARTON BOX SEALING
MACHIN WITH SIDE SEALING
MACHINE

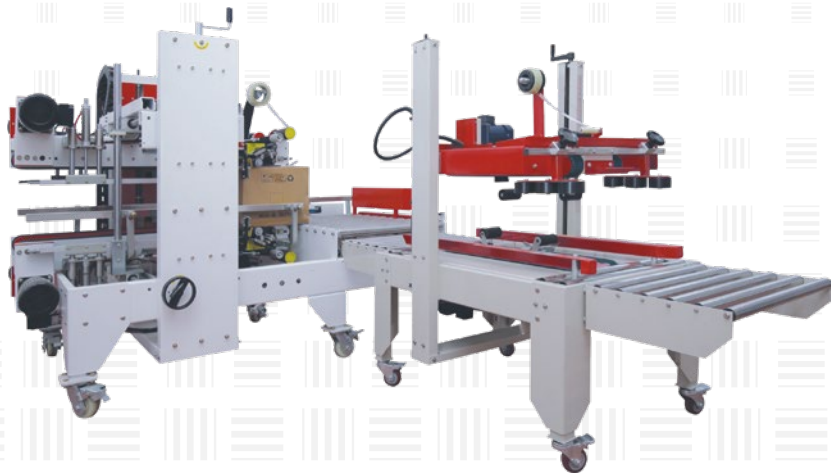

> 技术参数 <

型号 Model	Carton box sealing machine	Box side sealing machine
电源电压 SUPPLY VOLTAGE	220V/50Hz	220V/60-50Hz
功率 POWER	180W	1000W
输送速度 CONVEYING SPEED	0-18m/min	17.5m/min
胶带宽度 FILM WIDTH	60-78mm	
胶带封头 ADHESIVE TAPE HEAD	50-70mm(Adjustable)	
封箱长度 SEALING LENGTH	150mm-+%	200-500mm
封箱宽度 SEALING WIDTH	150-500mm(48mm贴带器)	320-500mm
封箱高度 SEALING HEIGHT	150-500mm	180-500mm
台面高度 TABLE HEIGHT	570-730mm	660-740mm(Adjustable)
工作气压 OPERATING AIR PRESSURE	5-6kg/cm	
外形尺寸 DIMENSIONS	L1000*W830*H1240mm	1970*1100*1470mm
重量 WEIGHT		About 400kg

X-KXJ 801 开箱机

X-KXJ 801 AUTOMATIC
CARTON BOX OPENING
MACHINE



性能及特点 FEATURES ▶

- 1、高速开箱机采用机械式传动,并选用品牌零部件,电器元件及气动元件。

2、自动预警提醒补充纸箱,补充纸箱无需停机,节省更多时间。

3、折底不停留,输送中完成折底、封底,3秒钟完成吸箱、成型、折底。

4、封底整个过程高速、稳定、方便、经济。

5、机器采用PLC+人机界面控制,操作方便、维修简单、性能稳定
- 1, High-speed unpacking machine adopts mechanical transmission, and uses brand parts, electrical components and pneumatic components

2, Automatic pre-warning reminds the replenishment of carton, no need to stop the replenishment of carton, saving more time.

3, The bottom folding does not stop, the bottom folding and sealing are completed during the transportation, and the suction box, molding and bottom folding are completed in 3 seconds.

4, The whole process of back cover is high-speed, stable, convenient and economical.

5, The machine is controlled by PLC + human-machine interlace, which is easy to operate, simple to maintain, and stable in performance.

> 技术参数 <

型号 Model	X-KXJ 801
封箱速度 SEALING SPEED	500-600 cartons/H
封箱长度 SEALING LENGTH	L200-500mm
封箱宽度 SEALING WIDTH	W200-400mm
封箱高度 SEALING HEIGHT	H200-500mm
适用胶带 APPLICABLE TAPE	18-60-75Wmmx1000ml
台面高度 TABLE HEIGHT	620mm
电源电压 VOLTAGE	220V 50Hz/60Hz/1Ph 380V50Hz/60Hz/3Ph
工作气压 WORKING AIR PRESSURE	6kg/cm²100ml/min
噪音程度 NOISE LEVEL	80dB
耗电功率 POWER CONSUMPTION	0.2kw
外形尺寸 DIMENSIONS	L2070xW2000xH1100mm
重量 WEIGHT	About 405kg

X-ZSJ 全自动枕式包装机

X-ZSJ AUTOMATIC
FLOW PACK PACKING
MACHINE



X-ZSJ-H 全自动热收缩枕式包装机

X-ZSJ-H AUTOMATIC SHRINKING FLOW PACK
PACKING MACHINE



适用范围 APPLICATION ▶

适合于月饼、雪糕、米通、雪饼、蛋黄派、沙琪玛、巧克力、糖果、面包、方便面饼干、药品、日用品、工业零件、纸盒或托盘等各类有规则物体的包装。

This machine is mainly used for packaging bread/bakery, chocolate, sweets biscuit, vitelline pie, lollipop, moon cake, ice cream, card,wet tissue,spoon, tooth brush soap, scourer ball, syringe, hard-ware, commodity and the products with regular shape and no sticky.

- FEATURES

性能特点
- 1, 步进电机控制(可选用伺服电机), 袋长即设即切, 无需调节空走, 一步到位, 省时省膜。

2, 人机界面, 参数设定方便快捷。

3, 故障自诊断功能, 故障显示一目了然。

4, 高感度光电眼色标跟踪, 数字化输入封切位置, 使封切位置更加准确。
1. Stepper motor control (servo motor can be selected), bag length is set and cut immediately, no need to adjust the empty run, one-step to achieve, saving time and film.

2. Human-machine interface, parameter setting is convenient and fast.

3. Fault self-diagnosis function, fault display is clear at a glance.

4. High-sensitivity photoelectric eye color mark tracking, digital input sealing and cutting position, making the sealing and cutting position more accurate.

> 技术参数 <						
型号 Model	X-ZSJ 250	X-ZSJ 320	X-ZSJ 350	X-ZSJ 400	X-ZSJ 450	X-ZSJ 600
膜宽 FILM WIDTH	Max 250	Max 320	Max 350	Max 400	Max 450	Max 600
袋长 BAG LENGTH	65-190mm			65-230mm	65-450mm	
袋宽 BAG WIDTH	30-110mm		30-160mm	30-180mm		30-270mm
产品高度 PRODUCT HEIGHT	Max.40mm		Max.45mm	Max.65mm		
胶卷直径 FILM ROLL DIAMETER	Max.320mm					
包装速度 PACKING SPEED	40-230bags/min					
电源 POWER SPECIFICATION	220V50/60Hz,2.4kw					
外形尺寸 MACHINE SIZE	3770x670x1450mm			4020x800x1450mm		4380x970x1500mm
重量 WEIGHT	500kg			600kg	700kg	800kg

X-Y-ZLD 全自动吸嘴袋灌装机


X-Y-ZLD AUOTMATIC SPOUT POUCH
FILING MACHINE



应用 APPLICATION ▶

XYZ系列全自动灌装旋盖机是为适应新世纪市场需求而自主研发的大型压盖设备。其设计先进,加工手段严密,质量检测严格。同时我公司还可根据客户的不同要求增加其他功能,如接驳CIP清洗、出袋液位控制、脱袋输送、PLC控制系统等,以满足客户的需求。该产品外形美观,实用,整机采用不锈钢制作,符合国家卫生安全标准,您可以放心使用。

XYZ series automatic filling capping machine is in order to meet the new century, the market demand of self-developed technology of large gland device. Its advanced design, processing means to close, the strict quality inspection. At the same time, our company can also according to the different requirements of customers to increase other functions, such as connecting CIP cleaning, pouch discharging-liquid level controlling, off the bag conveyor, PLC control system, to meet customer demand. The product has good appearance, practical, complete machine are made of stainless steel, meet the national health and safety standards, you can use it at easy.

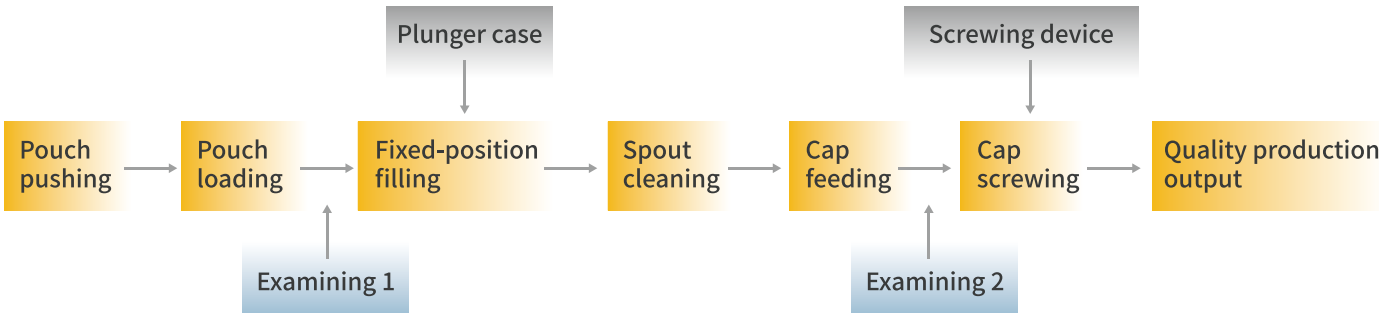

> 技术参数 <			
型号 Model	X-Y ZLD-R2	X-Y ZLD-R4	X-Y ZLD-R6
灌装嘴数量 FILLING NOZZLE	2 pieces	4 pieces	6 pieces
灌装速度 PACKING	2000 bags/Hour	3000-4000 bags/Hour	4000-5000 bags/Hour
灌装范围 VOLUME	50-500 ml (can be customize)		
功率 POWER	2.5 kw		
电压 VOLTAGE	380V/3Phases/60HZ Or customize		
气压 AIR PRESSURE	0.5-0.7Mpa		
空气消耗 AIR	0.65 m3/min		
尺寸 DIMENSION(L*W*H)	Main Machine: 1800*1260*1980mm Send bag holder: 1600*400*1300mm	Main Machine: 2200*1530*1980mm Send bag holder: 1800*400*1500mm	Main Machine: 2630*1830*1980mm Send bag holder: 2000*400*1500mm
重量 WEIGHT	1200kg	1400kg	1700kg

X-G 立式主机

X-G PACKING MACHINE BODY



十二头秤

12 HEADS ELECTRIC SCALE



粉剂头

POWDER FILLING HEAD



十头秤

TEN HEADS ELECTRIC SCALE



活塞泵

PISTON PUMP




双头电子秤

DOUBLE HEADS ELECTRIC SCALE



四头秤

FOUR HEADS ELECTRIC SCALE

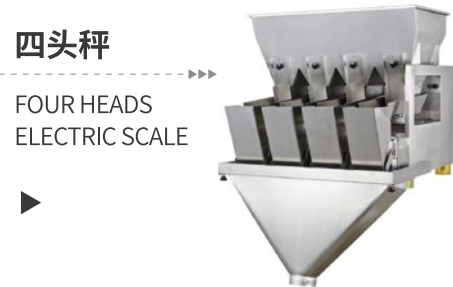


X-G 粉体给袋包装机

X-G AUTOAMTIC POWDER ROTARY PACKING MACHINE



X-G 颗粒给袋机包装机

AUTOMATIC GRANULE ROTARY PACKING MACHINE

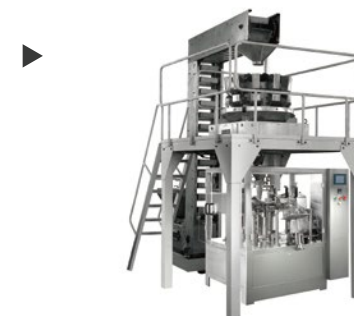

X-Y 液体给袋式包装机

X-Y AUTOMATIC LIQUID ROTARY PACKING MACHINE



性能特点 FEATURES ▶

1. 适用袋型广泛:各种预制袋,如平袋、自立袋(带拉链/不带拉链)。
2. 操作简便:PLC及彩色面板,面板故障指示。
3. 调整方便:只需10分钟即可适应不同的袋子。
4. 变频调速:速度可在范围内变频调节。
5. 无袋/开袋错误-不灌装-不封口,机器报警。
6. 气压不足时机器报警停机。
7. 卫生结构,产品接触部件采用sus304不锈钢。
8. 进口工程塑料轴承,无需加油,无污染。
9. 无油真空泵,避免生产环境污染。
10. 机器夹具和夹具主体采用316不锈钢。

1. Wide range of pouches: all kinds of pre-made pouches such as flat and stand-up pouches (with/without zip).
2. Easy to operate: PLC and color panel, fault indication on the panel.
3. Easy to adjust: Only needs 10 minutes to suitable for different pouches.
4. Frequency control: speed can be adjusted by frequency conversion within the range.
5. No pouch/incorrect pouch opening-no fill-no seal, machine alarm.
6. Machine alarm and stop when the inadequate air pressure.
7. Hygienic construction, the product contact parts are adopted sus304 stainless steel.
8. Imported engineering plastic bearings, no need to oil, no contamination.
9. Oil-free vacuum pump, avoid the pollution of the production environmental.
10. The machine clamp and clamp body use 316 stainless steel.

适用范围 APPLICATION ▶

1. 投资少、回报高、速度快、效率高。
2. 进口PLC全电脑控制系统,人机界面,大显示触摸屏,操作简单。
3. 伺服输膜系统,定位准确,整机性能优良。
4. 最大限度提高整机的可靠性、智能化。

1. Low investment, high return, fast speed and high efficiency.
2. Imported PLC full-computer control system, human-machine interface, large display touch screen, simple operation.
3. Servo film conveying system, accurate positioning, excellent performance of the whole machine.
4. Maximize the reliability and intelligence of the whole machine.

> 技术参数 <

型号 Model	420/520/620/720/820/920/1020
包装速度 PACKING SPEED	5-30bag/Min
最大膜宽 MAX FILM WIDTH	420-1020(mm)
Film thickness	0.04-0.09(mm)
Pulling film type	Double belt film pulling
Air consumption	0.8Mpa 0.4m ³ /min
Power source	3kw 220v 50Hz

> 技术参数 <

包装速度 PACKING SPEED	30-55bags/min (Depended on the product and filling weight)
适用袋子尺寸 BAG SIZE	W: 100-200mm L: 150-300mm
适用袋子类型 APPLICATION BAGS TYPE	All kinds of compound bags, such as flat bag, 3-side sealing bag, 4-side sealing bag, zipper bag, standup bag etc...
Filling Range	5-1500g
Total Power	2.6KW

X-DM 小字符打码机

X-DM INK PRINTING MACHINE



性能特点 FEATURES ▶

X-DM60型喷码机是在E60基础上的加强型,除具备E60所有的强大功能外,特殊增加了单触发、多次间隔喷印功能,可根据厂家喷印要求,采用人机对话方式,在喷码机屏幕上任意设定喷印次数。此项功能是联腾的又一力作,可以一次喷印一版多粒的医药、保健品、胶囊、化妆品等。另外,此种机型也专门配备了各种彩色墨水,可与您的产品相得益彰,喷印后美观漂亮。

© E60Y type of ink jet printer is based on enhanced E60, E60In addition to having all of the powerful features, an increase of one-shot special, multiple interval printing function,according to the manufacturer printing requirements, the use of man-machine dialogue,in ink jet printing on the screen arbitrary number.This feature is another masterpiece broad tech, you can print a version of a multi-grain medicine, health products,capsules, and cosmetics.In addition, such models are also equipped with a variety of colored inks specially, with your products complement each other, beautiful appearance after printing.

> 技术参数 <	
型号 Model	X-DM60
字体点阵 FONT DOT	5x77x9 16x16 16x24 24x24
喷印行数 PRINT THE NUMBER OF ROWS	1-3 lines
字符高度 CHARACTER HEIGHT	1.2-15mm
喷印速度 PRINT SPEED	5m/s (5x7)
配线速度 WIRE SPEED	1600 characters/s (5x7)
喷印方向 PRINTING DIRECTION	360 degrees rotatable
喷印材质 PRINTING MATERIAL	Paper, plastic products, metal, glass, wood, rubber products, etc.
机器材质 MACHINE MATERIAL	Full set of stainless steel
使用电源 USE THE POWER	220V+20VAC
功率 POWER	120W
机器尺寸 MACHINE SIZE	620x260x440
喷头尺寸 NOZZLE SIZE	21x4.5
	16 kg




X-DM 241B色带打码机

X-DM 241B RIBBON PRINTING MACHINE

X-DM 241G 跟随式打码机

X-DM 241G FLOWING PRINTING MACHINE

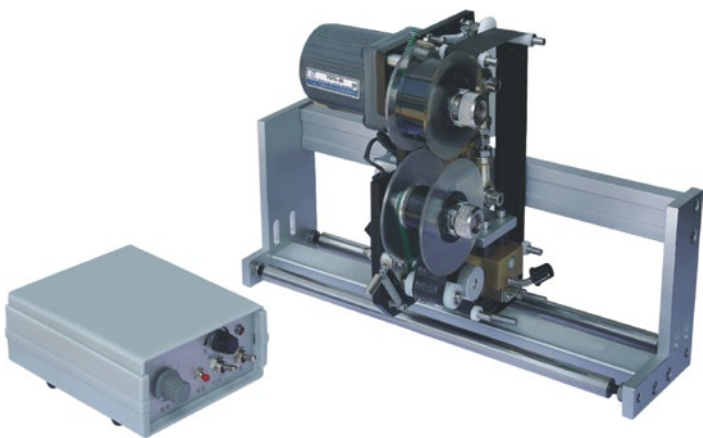

X-DM 手持式喷码机

X-DM HANDHELD PRINTING MACHINE

X-DM8 手动打码机

X-DM8 MANUAL PRINTING MACHINE





荣源机械

品质驱动创新 / 专业灌装设备成就您的生产力

90度转弯输送带

90° CONVEYOR



链板输送带

LINK TYPE CONVEYOR



皮带式输送机

FLAT TYPE CONVEYOR



XYZ 收瓶机

BOTTLES COLLECTION TABLE



分页机+打码机

FEEDING MACHINE WITH CODING MACHINE

箱式理瓶机

AUTOMATIC BOTTLES FEEDER



XYZ 理瓶机

BOTTLES FEEDING TABLE

